



MAIN DECK LAMINATE

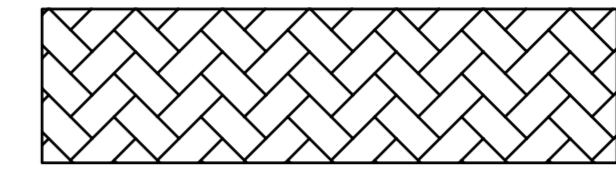

Ply	Material	Ply thk (mm)	Coverage	Area (m2)	Weight (kg/m2)	Mass (kg)
Outside						
1	CSM 300 g/m2	1,2	As shown	100	1,0	100,0
2	CDM 600.300 g/m2	1,5	As shown	100	2,4	240,0
3	CDM 600.300 g/m2	1,5	As shown	100	2,4	240,0
4	Core adhesive, Divilette or equal	-	As shown	100	-	-
5	Divinycell core 40mm, H60	30	As shown	100	1,8	180,0
6	Coreprimer	-	As shown	100	-	-
7	CDM 600.300 g/m2	1,5	As shown	100	2,4	240,0
8	CDM 600.300 g/m2	1,5	As shown	100	2,4	240,0
9	CSM 300 g/m2	0,6	As shown	100	1,0	100
Inside						
4,2+40+3,6=47,8mm						1340,0

MAIN DECK LAMINATE, STRONG POINTS

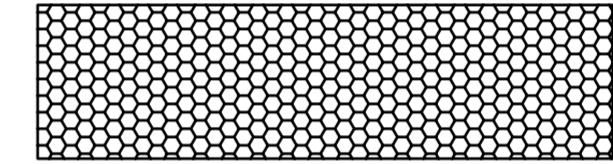

As above but changed core to Divinycell 40mm, H200

<p>1 2005-01-26 updated</p>		<p>Eric R. Segerlind</p>
<p>SEALOUNGE</p> <p>MAIN DECK LAMINATE</p> <p>2005-01-30</p>		<p>Eric R. Segerlind DESIGN</p> <p>Phone: +46(0)70-569 07 36 email: eric.segerlind@sealounge.com</p>
<p>SEALOUNGE DESIGN</p> <p>Eric R. Segerlind Design 472 91 HÄRNÅS, SWEDEN</p>		<p>ST-01am-1</p> <p>Scale: 1:25</p>
<p>Telefon +46 706 22 23 35 www.sealounge.se jacob@sealounge.se</p>		